

Surface Marker for Buried Utilities

TWO COLOR INJECTION MOLDED


MATERIAL

High impact polypropylene with excellent cold impact resistance. UV stabilizers and antioxidants added to provide complete protection and weather resistance in all climates.

SPECIFY AS

5.00 in. x 7.00 in. x 0.23 in. Sign with injection molded characters integral with locking grids. Color additives and UV stabilizers molded throughout the tags. Both copy and background have a minimum thickness of 0.090 inches

Text and graphics per customers request.

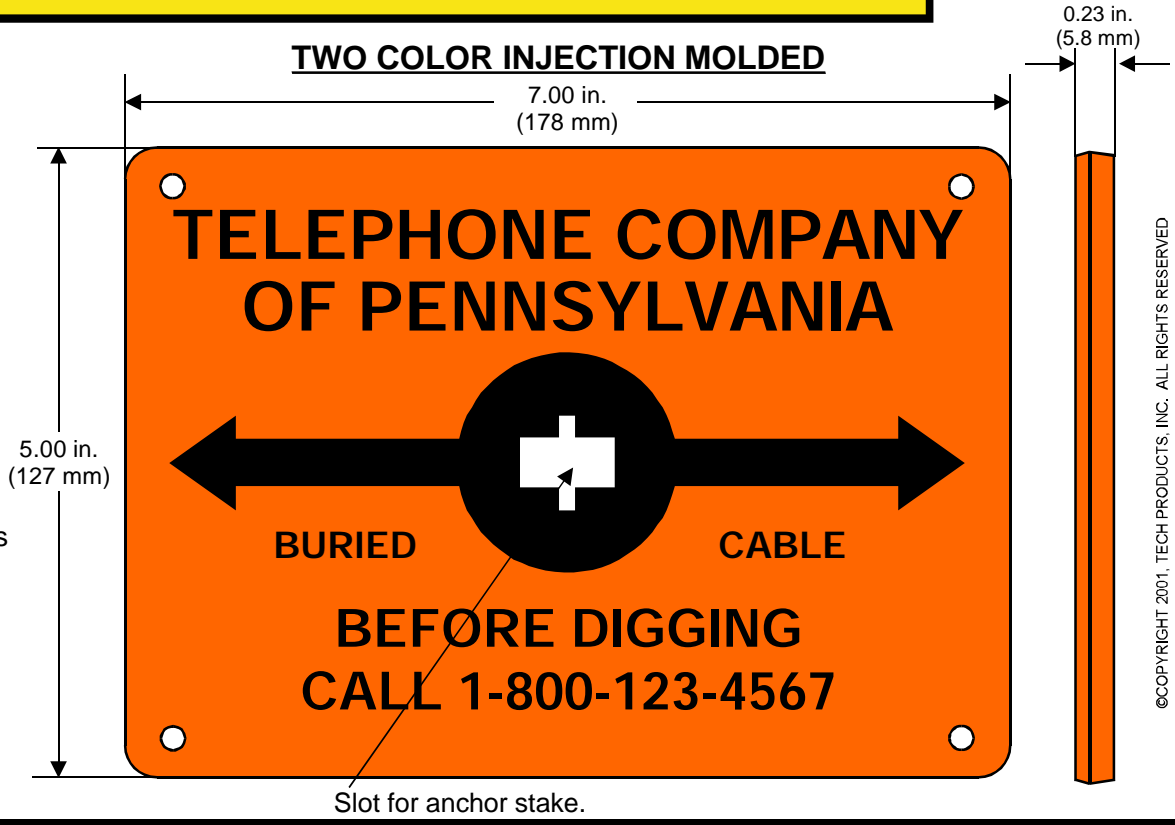

Slot for anchor stake.

First Shot





Text and graphics molded on locking grids.

Second Shot Molding Process



Second shot resin locks with the first shot grid. Both background and characters have a minimum thickness of 0.090 in. (2.3 mm)

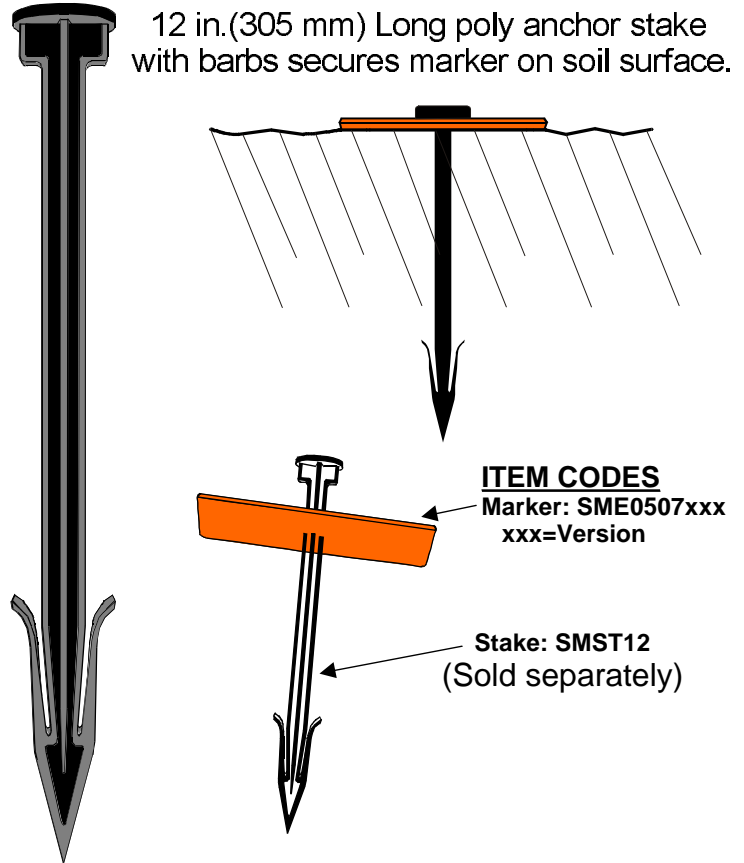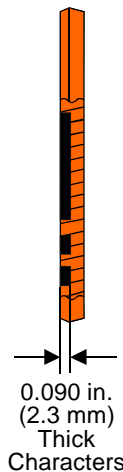

Tel: (800) 221-1311 or (718) 442-4900 or Fax: (718) 442-2124

e-mail: team@techproducts.com

Visit us at: www.techproducts.com

SPECELSM
09/04